




PALISADE® SA-HT

SYNTHETIC ROOF UNDERLAYMENT

Palisade® SA-HT is a high temperature (250°F), self-adhered roofing underlayment designed for steep slope roof applications. Palisade SA-HT includes a top surface with Stronghold Skid Resistant Technology®, which is designed to provide roofers with superior walkability in the most demanding steep slope conditions of wet & dusty surface environments. Palisade SA-HT is designed for use under metal, asphalt shingles, synthetic shingles, primed cedar shakes, slate and tiles.

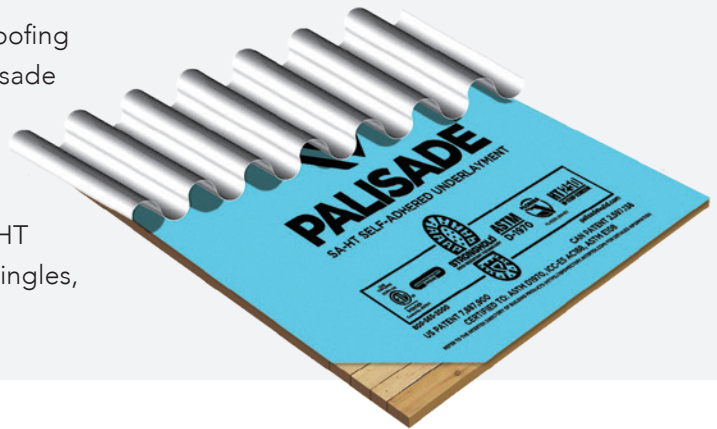

FEATURES & BENEFITS




Patented* Stronghold Skid Resistant Technology® delivers superior walking & roof loading traction



High nail tear strength woven PP facer vs. film facer



UV exposure up to 6 months before final roof covering is applied



High temperature (250°F) adhesive formulated for superior high temperature performance



Unique KOOL BLUE™ color technology produces lower heat & lower glare



Palisade® SA-HT meets or exceeds the following building codes:



Intertek Control No. 5027811





*US PATENT: 7,887,900, CDN PATENT: 2,597,138



800-565-2000 | roofunderlayment.com



PROPERTIES / TEST METHOD

| | |
|------------------------------------|---|
| Product SKU | YPALISADESA361A |
| Color | KOOL BLUE™ |
| Top Surface | Polymer-based Stronghold Skid Resistant Technology®  |
| Bottom Release Liner | Silicone Split Release Liner |
| Permeability / ASTM E96-00 | 0.01 perms |
| Nominal Thickness / ASTM D1777 | 40 mil (1 mm) |
| Nail Sealability / ASTM D1970 | Pass |
| Lap Sealability / ASTM D1970 | Pass |
| Tensile Strength / ASTM D226 | 121 lbf/in. (21 kN/m) |
| Tear Strength / ASTM D4523 | 160 lbf/in. (28 kN/m) |
| Elongation / ASTM D2523 | 16% |
| Low Temperature Flex. / ASTM D1970 | -22° F (-30°C) - Pass |
| Adhesion to Plywood / ASTM D1970 | 55 lbf/ft.: 75°F (25 kgf/30.5 cm: 24°C) |
| Adhesion to Plywood / ASTM D1970 | 12lbf/ft.: 40°F (5.5 kgf/30.5 cm: 24°C) |
| UV Exposure / ASTM G90 | 6 months |
| Temperature Range / ASTM D1970 | LT: 15°F (-9°C) to HT: 250°F (121°C)  |

ROLL / PALLET SPECS

| | |
|------------------|----------------|
| Length per Roll | 66.7' / 20.3 m |
| Width per Roll | 36" / 91.4 cm |
| Weight per Roll | 38 lbs / 17 kg |
| Square/Roll | 2 |
| Rolls per Pallet | 30 |



Scan for more info or visit roofunderlayment.com

